



Product Specifications

Display method:
Common Screen display
Atmospheric pressure: 86Kpa - 106Kpa
Detection method for CO₂ : Infrared (NDIR)
Sampling time: 1.5 seconds
Product Size: 145 x 78 x 97.2mm
Detection temperature: -10°C to 50°C;
Relative humidity: 20% - 85%
Storage temperature: -10°C to 60°C;
Concentration unit for CO₂:PPM
Power source: Lithium battery with 3000 mAh capacity;
5V DC power charging via micro USB port
Product weight: 225g

Product Description

This product is an air quality monitor that detects Carbon dioxide (CO₂), Temperature, and Humidity. It combines sensors real-time monitoring of Carbon dioxide (CO₂), temperature, and humidity on its display.

Considerations

Please read the instructions carefully before using this device.
Please place the unit in fresh air (outdoors – protected from moisture) for two minutes before use for most accurate result.
Please keep the manual handy for quick reference and troubleshooting.

Precautions

Avoid covering the air intake areas during use to avoid inaccurate measurements.
Avoid use of solvents to clean the product as residual fumes will skew air quality readings.
Avoid water or other liquids near the product to avoid electrical damage.
Do not allow unauthorized modification or repair of this product.


Features:

- Common Screen display
- Test variables: Carbon dioxide (CO₂), temperature, humidity
- Large 3000mAh capacity Lithium battery
- 5V Micro USB charging
- Low battery warning

Instructions

1. Start Up

When you long press the power button, the air quality monitor will boot up.

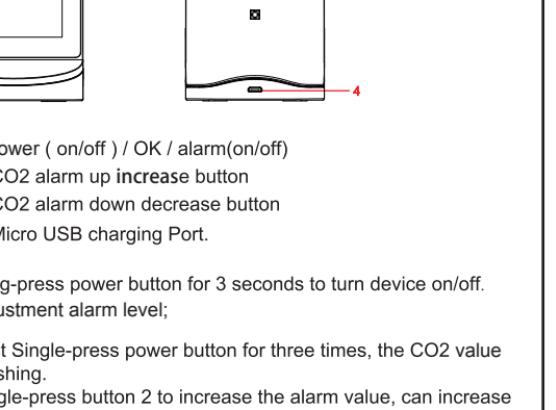


1. Power (on/off) / OK / alarm(on/off)
2. CO2 alarm up increase button
3. CO2 alarm down decrease button
4. Micro USB charging Port.

2. Key functions and settings



1. Power (on/off) / OK / alarm(on/off)
2. CO2 alarm up increase button
3. CO2 alarm down decrease button
4. Micro USB charging Port.

3. Data display formats

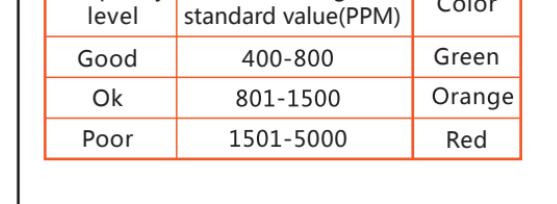

CO₂ current data
Humidity current data
Temperature current data

4. About Charging

When low battery icon is displayed, the device needs to be charged.
Insert the included or another compatible micro USB charging cable into the device.
Attach the other end to a 5V DC charger (such as a smart phone charger) that outputs DC 5V at >100mA.
Fully charge for at least 2-3 hours before use.
Avoid charging with a USB computer port which only outputs 50mA.

5. Parameters

CO₂ technical indicators

Measuring range: 400-5000PPM Sensor: CO₂ Infrared (NDIR)
Resolution: 1 PPM

Temperature and humidity technical indicators

Measuring range: -10-50°C Measurement accuracy: ± 1°C
Humidity range: 20%-85% RH Measurement accuracy: ± 4% RH

6. CO₂ air quality grade range

Air quality level	CO ₂ average standard value (PPM)	Color
Good	400-800	Green
Ok	801-1500	Orange
Poor	1501-5000	Red

7. Product List

Air Quality monitor	1
Micro USB charging cable	1
Product Manual	1